


铝蜂窝芯

铝蜂窝芯

结构示意图

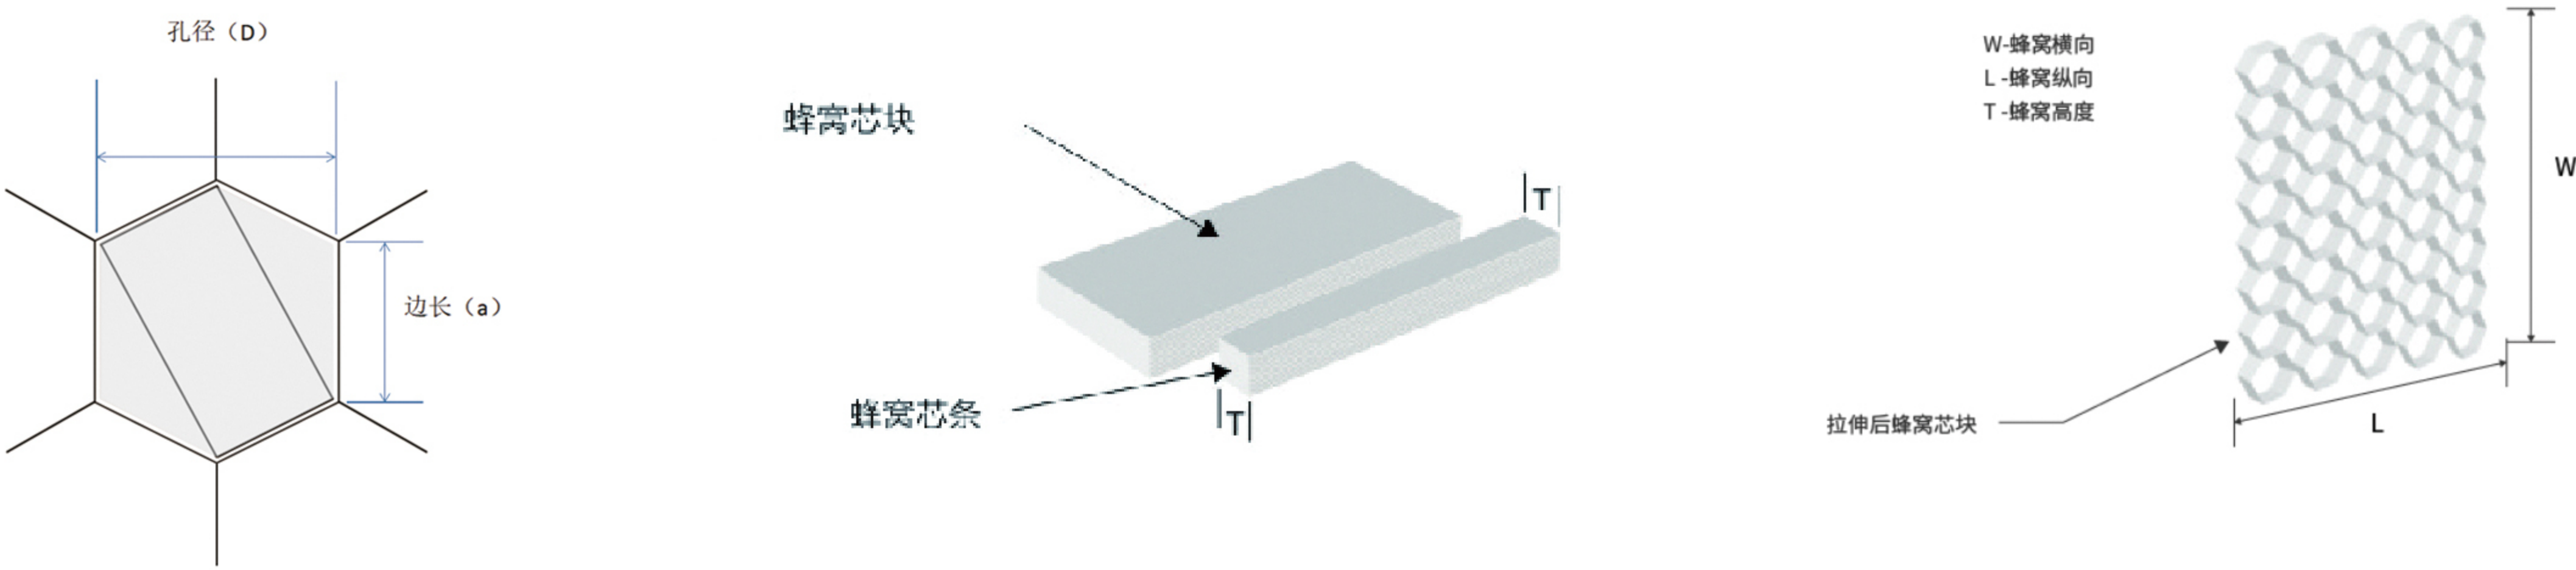

产品规格

规格						
边长mm)	0.6, 0.8, 1, 1.83, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 20, 50					
铝箔厚度(mm)	0.015, 0.021, 0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.1, 0.15, 0.2					
铝牌号	Al3003, Al5052					
供货形式	未展开形式（块状，条状）或展开形式（片状）； 打孔或不打孔					
技术参数表						
规格	边长	铝箔厚度	密度	抗压强度	纵向剪切强度	横向剪切强度
	(mm)	(mm)	(kg/m³)	(MPa)	(MPa)	(MPa)
BHC3003-5-0.03	5	0.03	27	0.53	0.44	0.24
BHC3003-5-0.04	5	0.04	31	0.66	0.53	0.30
BHC3003-4-0.03	4	0.03	33	0.73	0.58	0.33
BHC3003-4-0.04	4	0.04	39	0.98	0.75	0.43
BHC3003-5-0.05	5	0.05	41	1.07	0.80	0.47
BHC3003-3-0.03	3	0.03	44	1.18	0.89	0.52
BHC3003-5-0.06	5	0.06	49	1.43	1.03	0.60
BHC3003-3-0.04	3	0.04	52	1.60	1.15	0.67
BHC3003-4-0.05	4	0.05	53	1.65	1.18	0.69
BHC3003-4-0.06	4	0.06	61	2.07	1.48	0.86
BHC3003-2-0.03	2	0.03	66	2.39	1.70	1.00
BHC3003-5-0.08	5	0.08	67	2.45	1.74	1.02
BHC3003-3-0.05	3	0.05	68	2.50	1.78	1.04
BHC3003-2-0.04	2	0.04	77	3.10	2.18	1.25
BHC3003-苏州鸿赞铝蜂窝芯，3003系列						

应用场景



太阳能光热利用



新能源车箱体



轨道交通



电器产品（激光电视/投影屏幕）



电梯/缆车



建筑&装饰



苏州鸿赞蜂窝材料有限公司
邮件: info@beessun.com
电话: +86 512 69393102/6939 3106
网址: www.beessun.com www.beecore.com.cn



苏州鸿赞蜂窝材料有限公司
邮件: info@beessun.com
电话: +86 512 69393102/6939 3106
网址: www.beessun.com www.beecore.com.cn

